

# Miniman 4"

## The Clear-Thru performance arm



**Higher maximum  
air velocity**

**Lowest possible  
pressure drop**

**Lowest possible  
noise level**

**Reduced energy  
consumption**

**Exterior, easy  
adjustable joints**

**Supplied fully  
assembled**



© Copyright. All rights reserved.

### **Dust extraction with true efficiency**

*Clear-Thru, totally free from internal mechanisms, the Miniman is the high performance solution for dust applications. Grinding, polishing, slagging and other types of operations generating heavy dust are ideal for this 4" Ø arm. The unobstructed airflow means maximum extraction efficiency and lowest possible pressure drop. Considering the range of design benefits and quality that lasts, the Miniman 4" is a favourite choice for the pros.*

#### **PLYMOVENT CORP**

375 Raritan Center Parkway,  
Edison, N.J. 08837, USA  
Tel. (732) 417-0808, Fax (732) 417-1818  
www.plymovent.com, info@plymoventusa.com

#### **PLYMOVENT CANADA INC**

6615 Ordan Drive, Unit #3,  
Mississauga, Ontario L5T 1X2, Canada  
Tel. (905) 564-4748, Fax (905) 564-4609  
www.plymovent.com, info@plymovent.ca

# **PLYMOVENT**

- an ISO 9001 certified manufacturer

# Features tuned for Performance

## Design allowing high airflow


The 4" Miniman is ideal for applications where a high air velocity is desired such as in grinding, polishing and slagging applications with coarse or heavy dust particles. The Clear-Thru design allows for high maximum air volume at lowest possible noise level.

## Efficiency at reduced air volumes

The unobstructed airflow provides effective extraction also with low air volumes. This means reduced costs for the installation, lower demands on filter size and fan capacity, plus energy savings.

## Versatility for many tasks

Hanging or standing mounting together with the choice of two lengths make the new arm versatile. It is equally suitable for light fume and smoke applications like soldering, where a larger capture area is desired compared to the Miniman 3". It is also ideal for other light applications as spot welding, TIG welding and in schools and training centers.

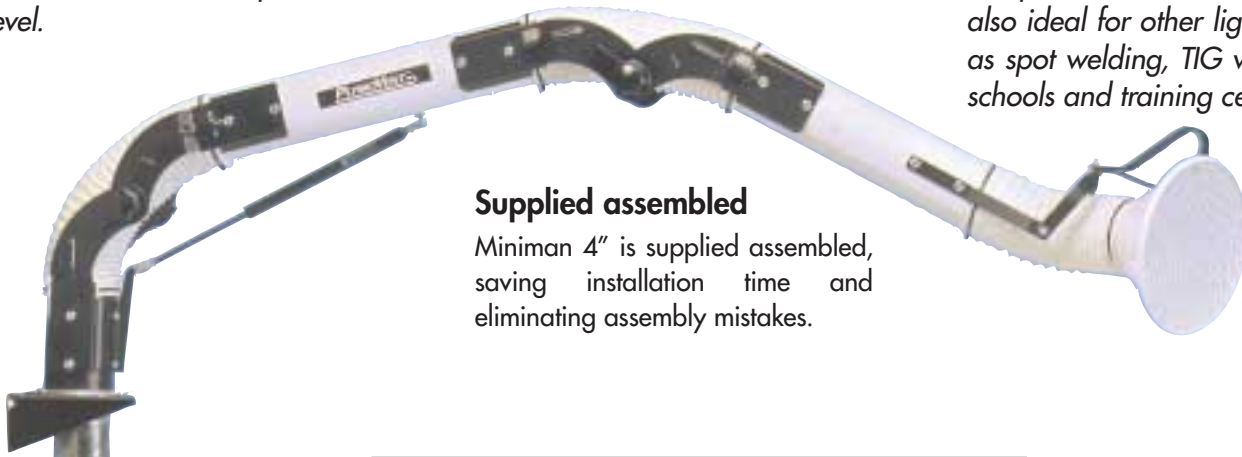


## Supplied assembled

Miniman 4" is supplied assembled, saving installation time and eliminating assembly mistakes.

## Smooth and easy handling

Arm balancing support by an elastic bungee cord (hanging) or gas spring (standing) provides very positive movement characteristics. The external joints are easily adjusted for smooth operation. In hanging application the arm reaches high above its mounting height. The mounting bracket allows for 360° rotation.

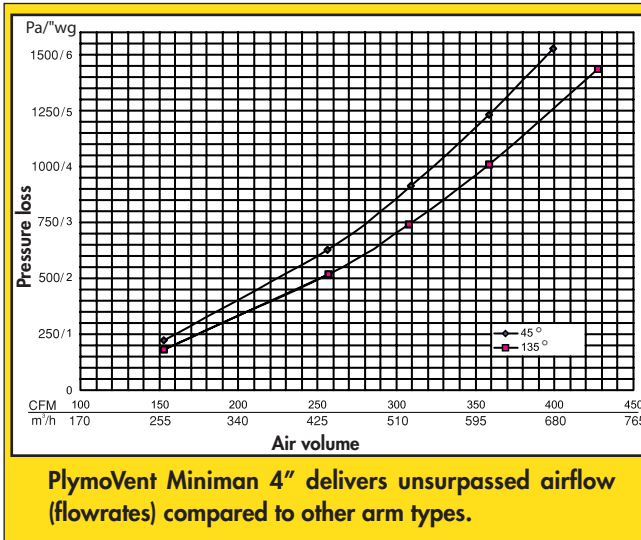

## Close-to-the-source exactness

The hood can easily be angled in all directions. Rubber sealed damper with accurate damper control available as accessory. The rubber sealing minimizes noise when the damper is shut and several damper positions allow fine-tuning of the airflow. A halogen light kit is also available as an accessory.

## TECHNICAL DATA

PRODUCT	MMS/MMH-100-15 MMS/MMH-100-15-W	MMS/MMH-100-21 MMS/MMH-100-21-W	MMS – Standing MMH – Hanging
Working radius	5'	7'	
Weight lbs	19,0	20,2	
Tube/hose Ø	4"	4"	
Max air volume	420 CFM	420 CFM	
Rec air volume	180–295 CFM	180–295 CFM	
<b>Accessories</b>			
Halogen light kit	HL-20/24-100	HL-20/24-100	
Damper	D-100	D-100	
Stanchion 3,6'	PA-110	PA-110	
Stanchion 7,2'	PA-220	PA-220	