

# Miniman Extraction Arm

## MMH-100/MMH-100-W/MMS-100/MMS-100-W

### Arm Specifications

- Rec. Air Flow: 100-350 CFM/170-595 m<sup>3</sup>/h
- Material: Aluminum
- Hose Diameter:  $\phi 4"/100\text{mm}$
- Hood Opening:  $\phi 9.45"/240\text{mm}$
- Arm Finish: Powder Coated PV Yellow RAL 1004 (Standard)  
Powder Coated White (-W Version)



### Hose Specifications

- Helix: Steel
- Material: PVC Coated Woven Polyamide
- Color: Black (Standard) or White (-W Version)

### Dimensional Data/Weights

	MMS-100-15/ MMS-100-15-W	MMS-100-21/ MMS-100-21-W	MMH-100-15/ MMH-100-15-W	MMH-100-21/ MMH-100-21-W
A	68-7/8"/1749mm	88-3/8"/2245mm	68-7/8"/1749mm	88-3/8"/2245mm
B	65-3/16"/1656mm	84-11/16"/2151mm	65-3/16"/1656mm	84-11/16"/2151mm
C	43-1/2"/1105mm	55"/1397mm	19-1/4"/488mm	31"/787mm
Weight	19lb/8.6kg	20.3lb/9.2kg	19lb/8.6kg	20.3lb/9.2kg
Max. Working Radius	5'/1.5m	7'/2.1m	5'/1.5m	7'/2.1m
Qty.				

- Notes:
1. Miniman-100 comes standard with debris screen
  2. Arms have no internal parts
  3. Damper kit and light kit are available as accessories

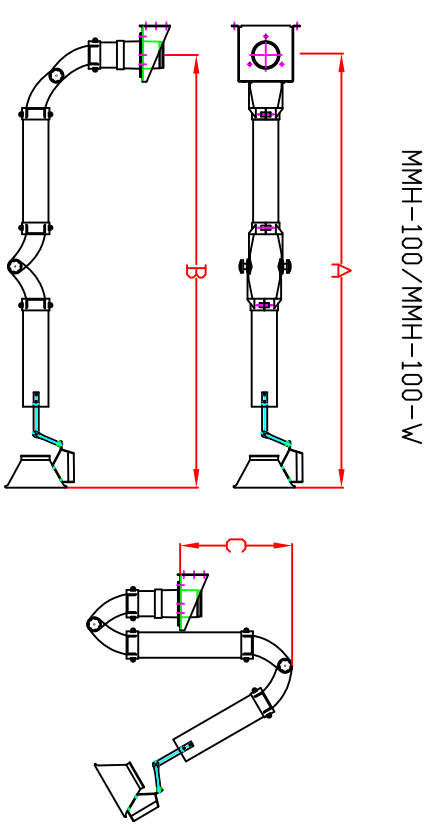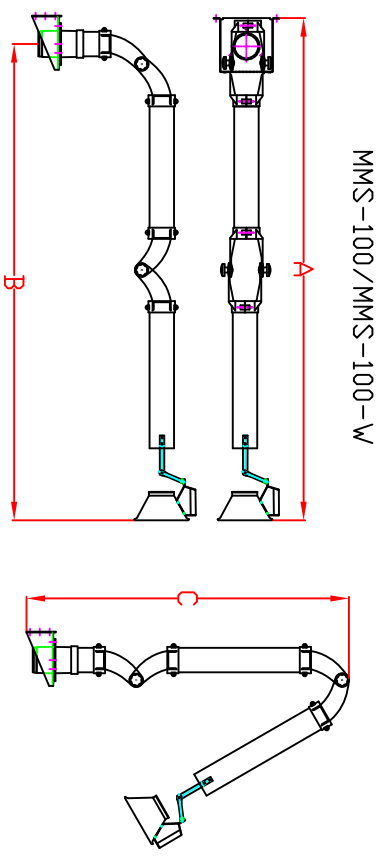

Disclaimer: The intended use of this drawing is to provide general equipment dimensions. The information provided is confidential and proprietary to Plymovent NA and is not to be re-created, published and/or otherwise disseminated without the express consent of Plymovent NA. Plymovent NA does not warrant the accuracy or reliability of the information provided. Plymovent NA disclaims any liability for this or any Plymovent NA drawing, for purposes other than its intended use. No warranty or actions may be taken against the violating party(s).

Job name:	DWG. BY: JP	Revision: 1	Rev. date: 2/27/09
Engineer:	PLYMOVENT NORTH AMERICA		
Customer:	115 MELRICH ROAD CRANBURY N.J. TEL: (609) 395-3500 FAX: (609) 655-0919 WWW.PLYMOVENT.COM		
	MM-100		